

Introducing...

# NO FAULT Safety Surface

## Poured-in-Place

### Applications

- ✓ Jogging Tracks
- ✓ Pool Decks
- ✓ Walkways
- ✓ Playgrounds

- Slip resistant, drains quickly and easy to maintain
- Provides seamless surface for all types of playgrounds and decking
- Can be installed both indoor or outdoor
- Proven durability
- Materials are finest EPDM peroxide cured granules and 100% polyurethane binder
- Professionally installed



Fall Heights for Playground Applications

DEPTH	FALL HEIGHT	DEPTH	FALL HEIGHT
1-3/4"	4'	3"	7'
2-1/4"	5'	3-1/2"	8'
2-1/2"	6'	4-1/4"	9'-10'




### Company Information:

No Fault Sport Group  
 3112 Valley Creek Drive Suite C  
 Baton Rouge, LA. 70808  
 Phone: 866-637-7678 (toll free)  
 Fax: 877-291-3821 (toll free)  
 E-Mail: info@nofault.com

### Colors Available:

Lt. Blue    Blue    Lt. Green    Green    Terra Cotta    Orange

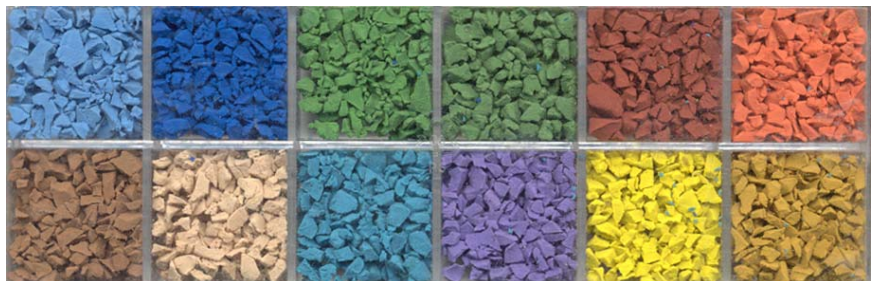

Brown    Tan    Teal    Purple    Yellow    Gold

(Also available in black)



3112 Valley Creek Dr. Ste C  
Baton Rouge, LA 70808  
1-866-NFSPORT  
www.nofault.com

## No Fault Safety Surface

### Poured-in-Place Surfacing for Playgrounds

#### About Us

No Fault has been involved in the construction and surfacing of sports and recreation facilities for over 30 years. We began as a recreational construction company specializing in tennis court and track construction. No Fault developed the first poured-in-place system in 1986 to meet the needs of a growing playground industry.



No Fault's dedication to excellence and commitment to safety has resulted in one of the most widely recognized names and sought after playground safety surfaces in the industry. No Fault provides coast-to-coast installations making us one of the largest installers of safety surface in the nation.


#### Product Description

- Poured-in-place and troweled to provide a resilient, seamless rubber surface.
- Material consists of polyurethane resin-based post consumer recycled rubber shred material from tires and capped with new high quality EPDM rubber.
- Binder is non-flammable, non-shrinking, one part moisture cured polyurethane adhesive which will bond to concrete or asphalt.


#### Standard Colors

- No Fault Safety Surface standard color blends consist of 50% EPDM color and 50% EPDM black.
- The four standard colors include:

Green




Tan



Terra Cotta



Blue



#### Maintenance

- Generally No Fault Safety Surface will be kept clean with wind and rain, however occasional manual cleaning is required.
- No Fault Safety Surface can easily be cleaned using a broom, medium bristle scrub brush, garden hose with spray nozzle, pressure washer, and Wet/Dry Shop Vac.